





Performance Curves: 60 Hz Vacuum

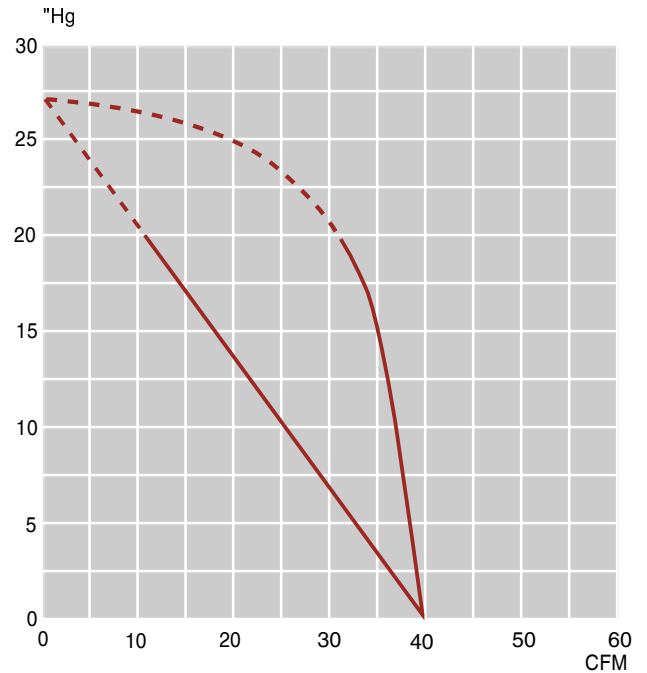


Features:

- Oil free
- Maintenance free
- Operates quietly - maximum 70 dB (A)
- Cooler running outboard bearings increase service life
- Built-in particulate filters and silencers.
- Compact light weight design
- Handles vacuum and/or pressure applications
- Ideal alternative to standard oil sealed rotary vane pumps

Pressure

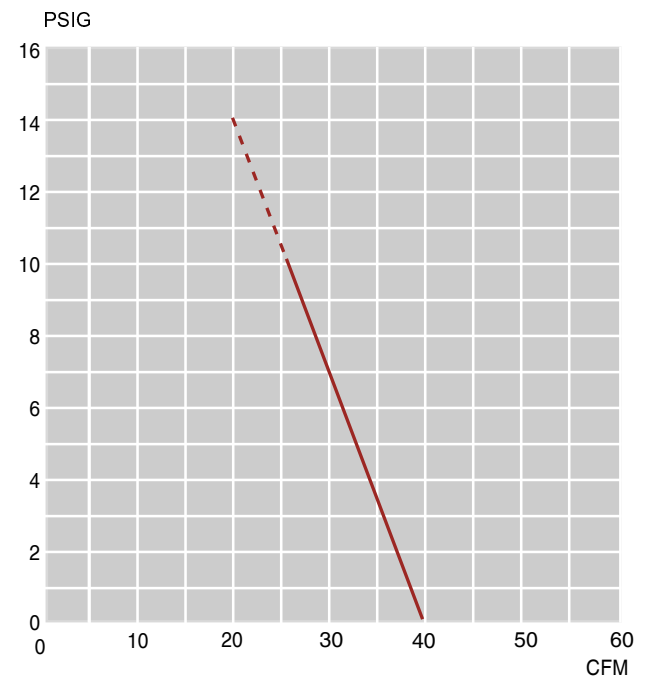

Dimensions: (inches)

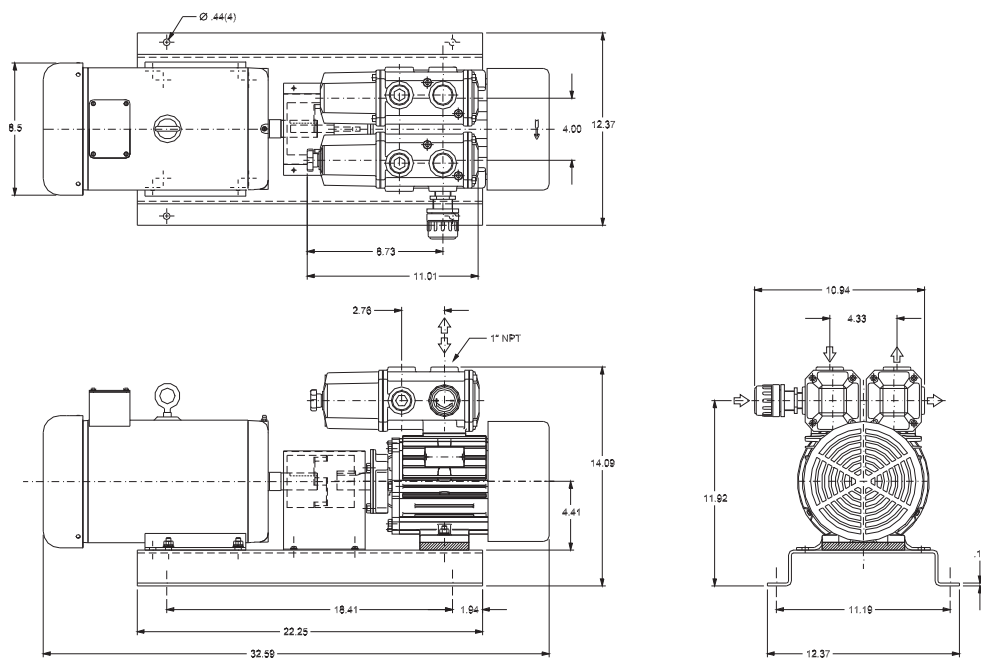

Notes:

- a: Standard voltage for three phase pump is 208-230/460V 3ph 60Hz.
- b: Standard voltage for single phase pump is 115/230/1ph 50/60Hz or 115V/1ph 60Hz or 230V/1ph 60Hz
- c: All pumps available in 50Hz frequency and with other voltages.

Specifications subject to change without notice.
Please contact factory for specification updates.

Specifications: (Vacuum)

Model Number	Motor	RPM	HP	CFM	Max. Hg"	LBS	Kgs
KRX7A-SS-1701-G3	w/o Motor			40	27.5"	115	52
KRX7A-SS-1701-G1	208-230/460V	1170	3	40	27.5"	165	75
KRX7A-SS-1702-G1	115/230V	1170	3	40	27.5"	180	82

Specifications: (Pressure)

Model Number	Motor	RPM	HP	CFM	Max. PSI	LBS	Kgs
KRX7A-SS-1770-G3	w/o Motor			40	14psig	115	52
KRX7A-SS-1770-G1	208-230/460V	1170	3	40	14psig	165	75
KRX7A-SS-1771-G1	115/230V	1170	3	40	14psig	180	82