

MADE IN ITALY

# Medic+Air

Sistemi di generazione aria compressa per dentisti e laboratori  
Compressed air generator systems for dentists and laboratories



Aria compressa  
per servire fino a 8 riunioni  
Compressed air for  
up to 8 dental chairs



Senza olio  
Oil-free



3 Anni di garanzia  
(sul gruppo pompante)  
3 years warranty  
(on the compressor pump)



Bassa rumorosità  
Low noise level



Protezione interna  
antiossidazione  
Internal oxidation-  
proofed protection



## La gamma

I compressori senza olio della serie MedicAir sono il risultato dell'esperienza di oltre mezzo secolo di Ricerca & Sviluppo nel settore e sono stati appositamente progettati per il settore dentistico.

La configurazione selezionata per queste macchine consente massime prestazioni, affidabilità, lunga vita operativa e, naturalmente, la generazione di aria compressa "oilfree", essiccatrice ed igienicamente perfetta per l'utilizzo nel settore dentistico ed odontotecnico.

Questi compressori sono stati realizzati per soddisfare tutti questi requisiti, grazie alla costante ricerca dei componenti più moderni ed innovativi, alla eccellente tecnica costruttiva ed all'accurata selezione della componentistica più affidabile presente sul mercato.

I compressori MedicAir sono disponibili in diverse versioni ed allestimenti:

- **Dr. SONIC:** con il più basso livello di rumorosità sul mercato (dB(A) per HP), grazie alla specifica carenatura provvista di materiale insonorizzante e dotata di ventola di raffreddamento indipendente. Questi modelli possono essere dotati dell'esclusivo essiccatore ad adsorbimento a doppia o a singola colonna e sono particolarmente adatti per essere installati vicino alla zona di lavoro, dove la rumorosità deve essere particolarmente contenuta.
- **MED:** la realizzazione di queste macchine prevede l'utilizzo della stessa componentistica della serie Dr. SONIC, ma senza la carenatura insonorizzante. I compressori della serie MED sono progettati per applicazioni modulari "entry level", per favorire quei professionisti che desiderano aggiungere l'essiccatore in un secondo tempo.

Dr. SONIC e MED sono compressori estremamente compatti (richiedono meno di 0,6 m<sup>2</sup> in pianta) ed entrambi sono provvisti di serie del "dispositivo di avviamento sicuro" che garantisce la partenza della macchina senza sovraccarichi, anche in caso di caduta di tensione.

L'aria compressa prodotta da un compressore MedicAir è:

- priva di olio, grazie alla compressione senza olio;
- priva di condensa, grazie all'essiccatore ad elevata efficienza (nei modelli ove previsto);
- inodore ed igienica, grazie al trattamento interno del serbatoio di accumulo.

La gamma di alta fascia MED e Dr. SONIC (3 anni di garanzia) è integrata dai modelli AirLab, specificatamente progettati per limitare i costi di investimento per laboratori dentistici ed odontotecnici.

Oltre alle versioni complete, i compressori MedicAir possono essere forniti come unità singole per essere installate secondo ogni specifica esigenza.

Fare riferimento all'ultima pagina per altri accessori e optionals.

## The range

*MedicAir oilfree compressors derive from the experience of more than half a century of R&D, and have been developed specifically for the dental field.*

*They have been designed to grant the best performance, trouble-free operation, long life and, of course, the oilfree, dry and hygienic compressed air required by the dentist or the dental technician.*

*Our compressors have been made to meet these expectations through a constant attention to an innovative design, an exceptional technical workmanship and an enhanced reliability of all components used in the production process.*

**MedicAir compressors are available in different configurations:**

- **Dr. SONIC series:** the lowest noise ratio (dB(A) vs HP) on the market, thanks to a special shroud filled with soundproofing material, with internal cooling fan. These models can be equipped with the exclusive double or single-tower adsorption dryer and are especially suitable to be placed close to the practice area, where the noise level must be kept at a minimum.
- **MED series:** made with the same high-quality components of the Dr Sonic range, but without shroud. MED compressors have been designed for modular applications, in order to be the quality "entry-level" for those dentists who want to add the dryer, immediately or at a later time.

*Both Dr. SONIC and MED compressors are extremely compact (they need less than 0,6 m<sup>2</sup> on the ground) and both are equipped as standard with the "secure starting" electrical system, which allows the compressor to restart with no problems even after a case of power failure.*

**Compressed air output by a MedicAir compressor is:**

- free of oily residues, thanks to the oilless compression;
- free of condensate, thanks to the adsorption dryer with high drying power (in models where installed);
- free of any smell, thanks to the high-thickness inner coating of the tank, made with anti-oxydant epoxy paint.

*Dr. SONIC and MED top-series (3 years warranty) are completed with AirLab newest range: specifically designed for "budget" applications for dental laboratories and other para-medical applications.*

*In addition to the standard models, MedicAir compressor pumps can be supplied as spare units to configure stationary installations according to specific needs of the user (dental clinics, hospitals, etc.).*

*Other accessories are available as optional, see the last page of this catalogue.*

## Dry air: why?

### A quality dryer is an essential equipment for the dentist.

The ambient air contains humidity and impurities which must be duly treated in order to guarantee clean, dry and pure air to the patients and to avoid the risk of corrosion and oxidation of the expensive dental instruments which are connected to the compressor.

The exclusive "Double-Column" MedicAir absorption dryer meets the highest requirements and guarantees the constant supply of oil-free and dry compressed air for the optimum protection of the patient health.

The advantages of the "Double-Column" system are the following:

- no additional installation (the system is integrated with the compressor);
- no oxidation or corrosion;
- optimum air quality for patients, instruments and equipments;
- compactness;
- fully automatic operation;
- easy maintenance;
- low operative costs.

The "Double-Column" dryer is an integrated system, its working cycle lasts approx 5 minutes, during this cycle one of the two columns is active, and thus holds the water vapour conveyed by the compressed air, whilst the second column is in regeneration mode and vents the humidity as wet air through a solenoid valve. The cycle is reversed by a timer. Once regenerated, the desiccant is chemically unchanged and recuperates its full effectiveness.

The "Single-Column" absorption dryer is an alternative air drying system which has the same function and the same operational cycle of the Double-Tower dryer.

The difference is that with this system the regeneration of the desiccant is not made in continuous (therefore allowing a continuous use of the compressors) but during the time of shutdowns of the machine.

Since in dentistry the compressor is used with a duty cycle largely under 50%, this system is widely used with dental compressors.

The advantages of the "Single-Column" system are the following:


- no additional installation (the system is integrated with the compressor);
- no oxidation and corrosion;
- optimum air for patients, instruments and equipments;
- compactness;
- fully automatic operation;
- easy maintenance;
- low operative costs;
- no power loss during the regeneration process.

The operational cycle is the following:

- ambient air enter the compressor through the air inlet filter;
- air is compressed and driven to the cooler;
- because of the cooling, part of the humidity is condensed;
- the condensate is collected in the separator and drained off;
- the air enters the drying tower where a special desiccant removes the remaining humidity;
- the clean, dry and oilfree compressed air is stored in a receiver treated with an internal anticorrosion coating.

After the compressors shuts down the desiccant is automatically regenerated by dry air.

It remains chemically unchanged and retain its full effectiveness.

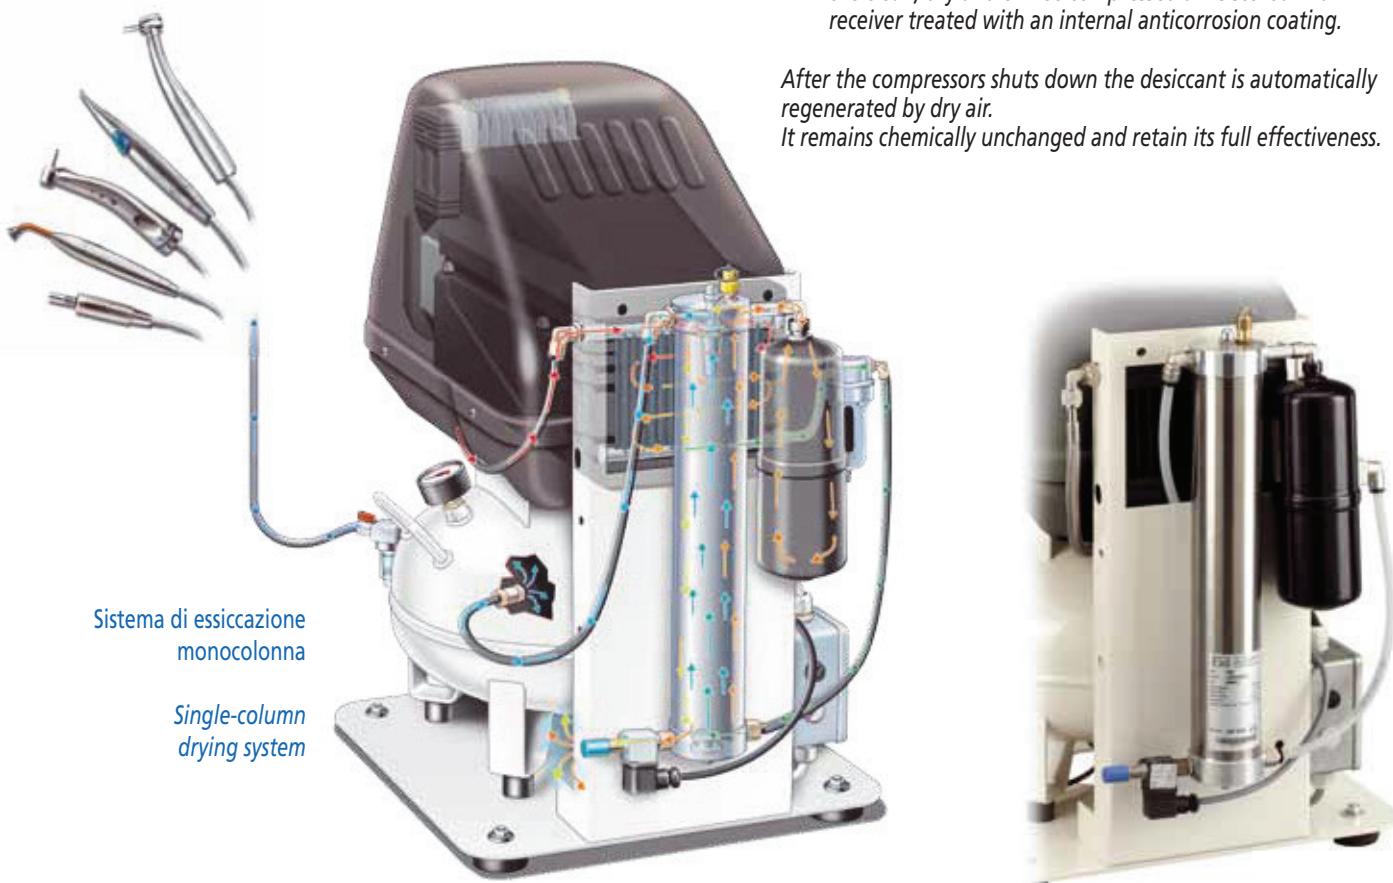

# Med 102 - Dr. Sonic 102

IDEALI PER 1 RIUNITO, MINIMO INGOMBRO GRAZIE AL DESIGN SUPERCOMPATTO.  
IDEAL FOR 1 DENTAL CHAIR - MINIMUM FOOT PRINT WITH A SUPERCOMPACT DESIGN.



- Serbatoio da 24 litri, con protezione interna anti-ossidazione.
- Gruppo pompante con pistone a secco in materiale composito approvato, con ventola ad alta portata e convogliata per un migliore raffreddamento.
- Interruttore on-off.
- Cavo con spina Plug-and-Play.
- Filtro uscita aria.
- Sistema di riduzione delle vibrazioni.
- Doppio manico per una facile movimentazione.
- Protezione termica del motore.
- Versione silenziata Dr. Sonic con carenatura insonorizzante ed essiccatore monocolumna (FM).

- 24-lt tank, with inner anti-oxidant coating.
- Pump featuring dry piston in approved composite material, with high-capacity fan and forced air system for improved cooling.
- On-off switch.
- Cable with Plug-and-Play plug.
- Air outlet filter.
- Anti-vibration damping system.
- Double handle for easier handling.
- Motor thermal cut-out.
- Dr. Sonic silenced version with soundproofing casing and single-column drier (FM).



Med 102-24F-0,75M



Dr. Sonic 102-24F-FM-0,75M

| Codice<br>Code       | Prodotto<br>Product       |       |        |                   |        |    |              |       |      |      |         |        |    |                |    |     |
|----------------------|---------------------------|-------|--------|-------------------|--------|----|--------------|-------|------|------|---------|--------|----|----------------|----|-----|
|                      |                           | Model | l/min. | m <sup>3</sup> /h | c.f.m. | lt | bar - p.s.i. | dB(A) | kW   | HP   | Volt/Ph | R.P.M. | n° | L x D x H (cm) | kg | lbs |
| <b>FOCN104FMD006</b> | Med 102-24F-0,75M         |       |        |                   |        |    |              |       |      |      |         |        |    | 40 x 45 x 62   | 32 | 70  |
| <b>FOCN104FMD007</b> | Med 102-24F-FM-0,75M      | OL102 | 55     | 3,3               | 1,94   | 24 | 8 - 116      | 65    | 0,55 | 0,75 | 230/1   | 1400   | 1  | 58 x 46 x 68   | 45 | 98  |
| <b>FOCN104FMD008</b> | Dr.Sonic 102-24F-0,75M    | OL102 | 55     | 3,3               | 1,94   | 24 | 8 - 116      | 61    | 0,55 | 0,75 | 230/1   | 1400   | 1  | 53 x 46 x 72   | 49 | 107 |
| <b>FOCN104FMD009</b> | Dr.Sonic 102-24F-FM-0,75M |       |        |                   |        |    |              |       |      |      |         |        |    | 70 x 50 x 75   | 62 | 136 |

Versioni con diverse tensioni e/o frequenze disponibili a richiesta.  
Versions featuring different voltage and/or frequency ratings are available on request.

# Med 160 - Dr. Sonic 160

IDEALI PER 1/2 RIUNITI, MINIMO INGOMBRO GRAZIE AL DESIGN SUPERCOMPATTO.  
IDEAL FOR 1/2 DENTAL CHAIRS - MINIMUM FOOT PRINT WITH A SUPERCOMPACT DESIGN.



- Serbatoio da 24 litri, con protezione interna anti-ossidazione.
- Ventola ad alta portata convogliata per un facile raffreddamento.
- Interruttore on-off.
- Cavo con spina Plug-and-Play.
- Filtro uscita aria.
- Sistema di riduzione delle vibrazioni.
- Doppio manico per una facile movimentazione.
- Protezione termica del motore.
- Versione silenziata Dr Sonic con carenatura insonorizzante ed essiccatore monocolumna (FM).

- 24-lt tank, with inner anti-oxidant coating.
- High-capacity fan and forced air system for improved cooling.
- On-off switch.
- Cable with Plug-and-Play plug.
- Air outlet filter.
- Anti-vibration damping system.
- Double handle for easier handling.
- Motor thermal cut-out.
- Dr Sonic silenced version with soundproofing casing and single-column drier (FM).



Med 160-24F-1,5M



Dr. Sonic 160-24F-FM-1,5M



| Codice<br>Code       | Prodotto<br>Product      | Model  | AIR S bar |                   |        | lt | MAX     | dB(A) | kW  | HP  | Volt/Ph | R.P.M. | n° | L x D x H (cm) | kg | lbs |
|----------------------|--------------------------|--------|-----------|-------------------|--------|----|---------|-------|-----|-----|---------|--------|----|----------------|----|-----|
|                      |                          |        | l/min.    | m <sup>3</sup> /h | c.f.m. |    |         |       |     |     |         |        |    |                |    |     |
| <b>FMCN304FNM446</b> | Med 160-24F-1,5M         | MK 160 | 115       | 6,9               | 4      | 24 | 8 - 116 | 69    | 1,1 | 1,5 | 230/1   | 1400   | 1  | 40 x 45 x 67   | 38 | 83  |
| <b>FOCT304FNM433</b> | Med 160-24F-FM-1,5M      |        |           |                   |        |    |         |       |     |     |         |        |    | 70 x 46 x 75   | 51 | 112 |
| <b>FMCN304FNM448</b> | Dr.Sonic 160-24F-1,5M    | MK 160 | 115       | 6,9               | 4      | 24 | 8 - 116 | 56    | 1,1 | 1,5 | 230/1   | 1400   | 1  | 40 x 50 x 75   | 55 | 120 |
| <b>FOCT304FNM432</b> | Dr.Sonic 160-24F-FM-1,5M |        |           |                   |        |    |         |       |     |     |         |        |    | 70 x 50 x 75   | 68 | 149 |

Versioni con diverse tensioni e/o frequenze disponibili a richiesta.  
Versions featuring different voltage and/or frequency ratings are available on request.

# Med 320 - Dr. Sonic 320

IDEALI PER 3/4 RIUNITI, MINIMO INGOMBRO GRAZIE AL DESIGN SUPERCOMPATTO.  
IDEAL FOR 3/4 DENTAL CHAIRS - MINIMUM FOOT PRINT WITH A SUPERCOMPACT DESIGN.



- Serbatoio da 50 litri, con protezione interna anti-ossidazione.
- Ventola ad alta portata convogliata per un facile raffreddamento.
- Interruttore on-off.
- Cavo con spina Plug-and-Play.
- Filtro uscita aria.
- Sistema di riduzione delle vibrazioni.
- Doppio manico per una facile movimentazione.
- Protezione termica del motore.
- Versione silenziata Dr Sonic con carenatura insonorizzante ed essiccatore bi-colonna (ES).

- 50-lt tank, with inner anti-oxidant coating.
- High-capacity fan and forced air system for improved cooling.
- On-off switch.
- Cable with Plug-and-Play plug.
- Air outlet filter.
- Anti-vibration damping system.
- Double handle for easier handling.
- Motor thermal cut-out.
- Dr Sonic silenced version with soundproofing casing and double-column drier (ES).



Med 320-50V-3M



Dr. Sonic 320-50V-ES-3M

| Codice<br>Code | Prodotto<br>Product    | Model   | AIR    | 5 bar             | MAX | bar - p.s.i. | dB(A)   | kW | HP  | Volt/Ph | R.P.M. | n°   | L x D x H (cm) | kg           | lbs |     |
|----------------|------------------------|---------|--------|-------------------|-----|--------------|---------|----|-----|---------|--------|------|----------------|--------------|-----|-----|
|                |                        |         | l/min. | m <sup>3</sup> /h |     |              |         |    |     |         |        |      |                |              |     |     |
| FVDV504FNM292  | Med 320-50V-3M         | VKM 320 | 235    | 14                | 8,2 | 50           | 8 - 116 | 72 | 2,2 | 3       | 230/1  | 1400 | 2V             | 40 x 50 x 95 | 53  | 116 |
| FVDV504FNM294  | Med 320-50V-ES-3M      |         | 210    | 12,5              | 7,3 |              |         |    |     |         |        |      |                | 58 x 46 x 95 | 68  | 149 |
| FVDV504FNM297  | Dr.Sonic 320-50V-3M    | VKM 320 | 235    | 14                | 8,2 | 50           | 8 - 116 | 60 | 2,2 | 3       | 230/1  | 1400 | 2V             | 61 x 50 x 88 | 73  | 160 |
| FVDV504FNM459  | Dr.Sonic 320-50V-ES-3M |         | 210    | 12,5              | 7,3 |              |         |    |     |         |        |      |                | 70 x 50 x 95 | 89  | 194 |

Versioni con diverse tensioni e/o frequenze disponibili a richiesta.  
Versions featuring different voltage and/or frequency ratings are available on request.

# Med 640 - Dr. Sonic 640

IDEALI PER 6/8 RIUNITI, MINIMO INGOMBRO GRAZIE AL DESIGN SUPERCOMPATTO.  
IDEAL FOR 6/8 DENTAL CHAIRS - MINIMUM FOOT PRINT WITH A SUPERCOMPACT DESIGN.



- Serbatoio da 90 litri, con protezione interna antiossidazione.
- Ventola ad alta portata convogliata per un facile raffreddamento.
- Filtro uscita aria.
- Sistema a due livelli di riduzione delle vibrazioni (rispettivamente sotto gruppo e sotto serbatoio).
- Protezione termica del motore.
- Centralina elettronica di comando a risparmio energetico per utilizzare al meglio i 2 compressori.
- Versione silenziata Dr Sonic con carenatura insonorizzante ed essiccatore bi-colonna (ES).

- 90-lt tank, with inner anti-oxidant coating.
- High-capacity fan and forced air system for improved cooling.
- Air outlet filter.
- Double anti-vibration damping system (under motor and under tank).
- Motor thermal cut-out.
- Energy-saving electronic controller to use compressors in the best conditions.
- Dr Sonic silenced version with soundproofing casing and double-column drier (ES).



| Codice<br>Code | Prodotto<br>Product    |         | AIR → 5 bar |        |      |    |         |    |       |     |       |      |    |               |     |     |
|----------------|------------------------|---------|-------------|--------|------|----|---------|----|-------|-----|-------|------|----|---------------|-----|-----|
|                |                        |         | Model       | l/min. | m³/h |    |         |    |       |     |       |      |    |               |     |     |
| FVGN541FNN016  | Med 640-90F-6T         | VKM 320 | 470         | 28,2   | 16,6 | 90 | 8 - 116 | 76 | 2x2,2 | 2x3 | 400/3 | 1400 | 2V | 112 x 45 x 92 | 89  | 195 |
| FVGN541FMD029  | Dr.Sonic 640-90F-ES-6T | VKM 320 | 420         | 25     | 14,6 | 90 | 8 - 116 | 64 | 2x2,2 | 2x3 | 400/3 | 1400 | 2V | 112 x 72 x 82 | 118 | 258 |

Versioni con diverse tensioni e/o frequenze disponibili a richiesta.  
Versions featuring different voltage and/or frequency ratings are available on request.